

Jan. 29, 1924.

1,481,855

H. J. BACH

HAND PROTECTOR FOR WIND INSTRUMENTS

Filed Dec. 28, 1922

2 Sheets-Sheet 1

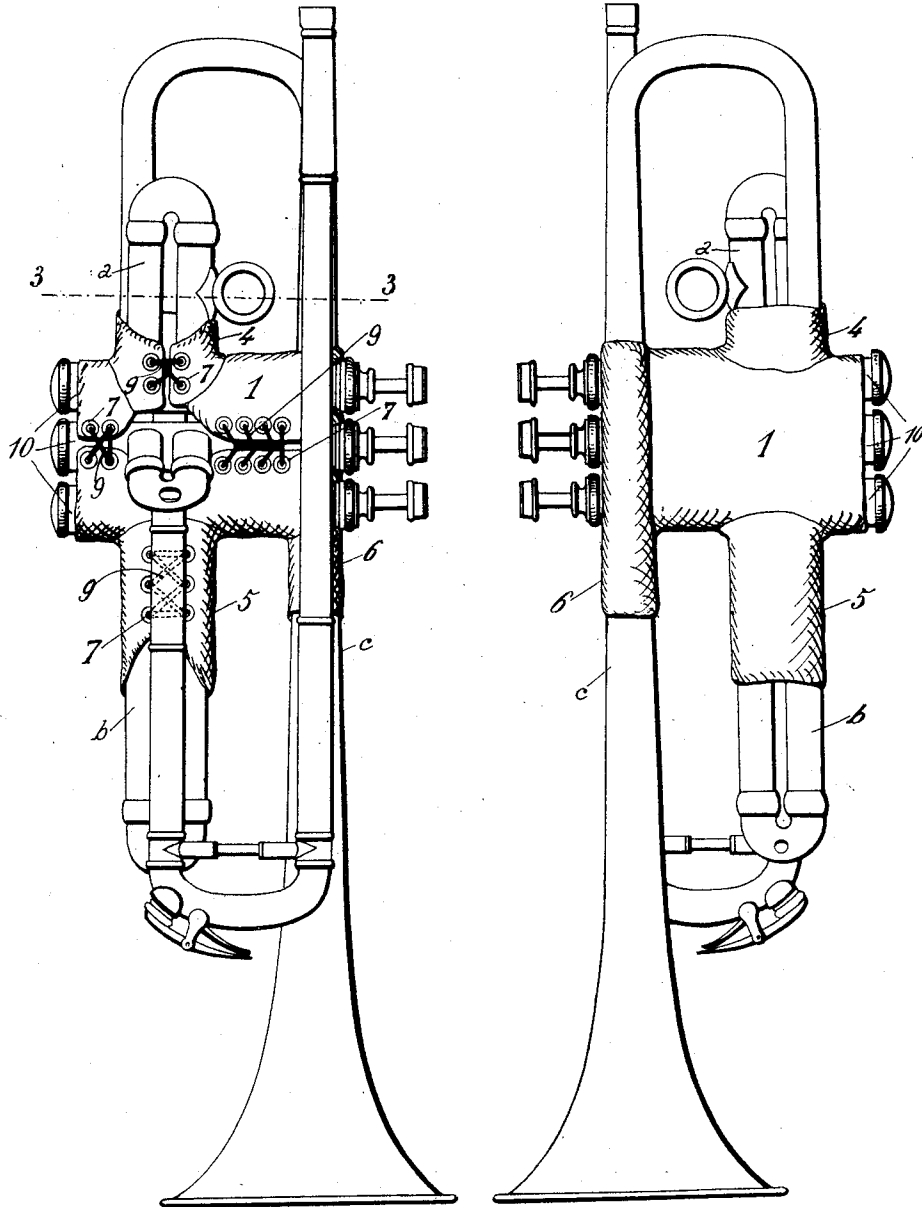


Fig. 1

Fig. 2

INVENTOR
Hans J. Bach
BY
W. J. Bissinger
ATTORNEY

Jan. 29, 1924.

1,481,855

H. J. BACH

HAND PROTECTOR FOR WIND INSTRUMENTS

Filed Dec. 28, 1922

2 Sheets-Sheet 2

Fig. 4

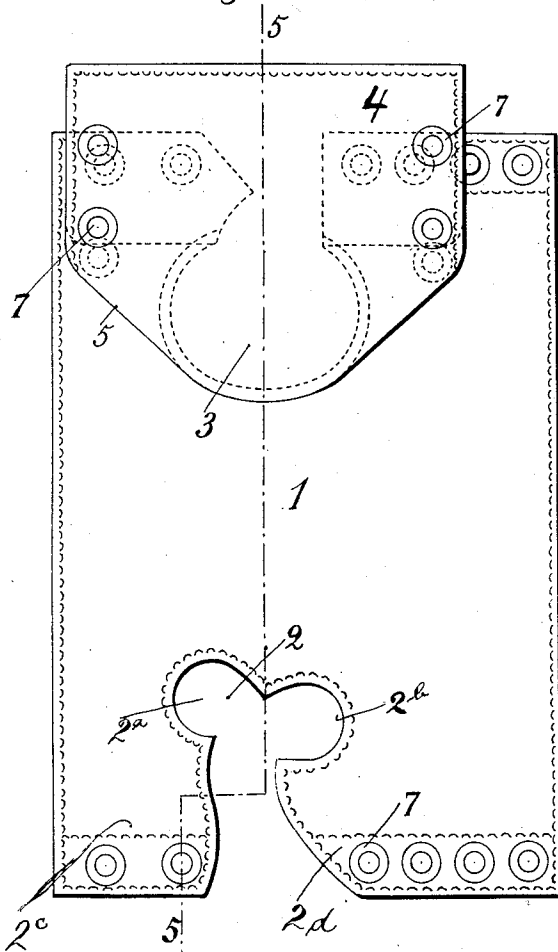


Fig. 5





Fig. 3

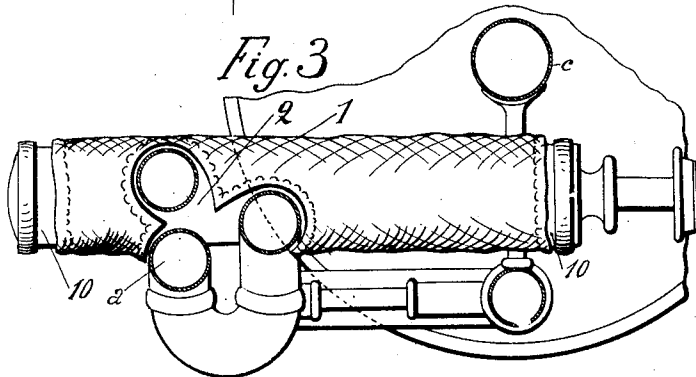

INVENTOR

Hans T. Bach
BY *M. F. Biasing*
ATTORNEY

UNITED STATES PATENT OFFICE.

HANS J. BACH, OF NEW YORK, N. Y., ASSIGNOR TO VINCENT BACH CORPORATION, OF NEW YORK, N. Y., A CORPORATION OF NEW YORK.

HAND PROTECTOR FOR WIND INSTRUMENTS.

Application filed December 28, 1922. Serial No. 609,403.

To all whom it may concern:

Be it known that I, HANS J. BACH, a citizen of the Austrian Republic, and residing in New York city, New York, and whose post-office address is 62 Ditmas Avenue, Astoria, Long Island, New York, have invented certain new and useful Improvements in Hand Protectors for Wind Instruments, of which the following is a specification.

My invention relates to a flexible protective hand grip and covering for wind instruments, such as cornets, trombones, and the like.

The object of the invention is to furnish a device, which shall protect the instrument from wear, soiling and tarnishing by the hand, keeps the hand and fingers of the player from the benumbing effect of contact with cold metal in winter, and keep the instrument from freezing up. It provides, moreover, a better grip between the hand and the instrument, without too much effort and the resulting fatigue, all this being accomplished without interference with the movable parts of the instrument.

In the accompanying drawings:

Fig. 1, shows, in side elevation, a cornet with the cover in place—the cover carrying three protecting sleeves in addition to the body part.

Fig. 2, a similar view from the reverse side of Fig. 1.

Fig. 3, is a transverse section on line 3—3 of Fig. 1, the guard or cover having but one sleeve attached thereto.

Fig. 4, is a top view of the flattened out cover shown in Fig. 3, and

Fig. 5, is a section of Figure 4, along the line 5—5.

In Figs. 3, 4 and 5, the cover or guard carries only one sleeve in addition to the body.

The cover may be made of leather, cloth or any other suitable material flexible enough to conform with its full and cut out portions, to the various parts to be protected. The body 1, of the cover, may be lined with any suitable (preferably soft) material 1^A. The lining and the outside being stitched together and the abutting edges provided with means for holding said edges in operative relation. These holding means may consist of eyelets and lacings, or buttons, hooks, etc.

Out of the body part 1 of the cover are cut the portions 2 and 3. These cut out portions are shaped to surround respectively the end tubes of the instrument adjacent to the piston box and have free flaps which fold around the respective tubes. To the body pieces, encircling the cut out portion, are attached sleeves; the sleeve 4 is attached to the body surrounding the cut out portion 2, and the sleeve 5 to the part surrounding the cut out portion 3; to the top of the body piece there is attached the sleeve 6.

The cover is applied by folding the body part 1 about the valve box 10 of the instrument (Figs. 1 and 2), the sleeve 4 fitting about the first bent end tube A at 3, of the instrument, the sleeve 5 encircling the second end tube B, and the sleeve 6, the beginning of the bell C of the cornet or other instrument. Lacings 9 and eyelets 7, or the equivalents thereof, hold the cover in place. It is understood, of course, that in the case of instruments differing in size and shape, the size and relative position of the cover and sleeves will be correspondingly modified, without departing from the spirit of the invention. In Figures 3, 4 and 5, the sleeves 5 and 6 are done away with. In other respects the cover of Figures 3, 4 and 5, is like that of Figures 1—2. The body portion 1, with lining 1^A, has its ends provided with fastening means, such as eyelets 7. The body is cut out at 2, so as to form two arc shaped flaps 2^C and 2^D and free ends 2^E and 2^F, the arc shaped portions of the flaps surrounding the respective end tubes B of the instrument when the guard cover is applied. At the other end the cut out portion 3 surrounds tubes A and carries a wing 4 covering a part of said tubes, the wing provided with eyelets 7 to enable the ends of the wing to be pulled together by lacing strings.

Having thus described the invention, it will be understood that changes can be made therein without departing from the principle of the invention.

What I claim and desire to secure by Letters Patent is:

1. A protecting cover for cornets and similar instruments having a piston box, comprising a body of flexible material having a contour which fits the piston box of the instrument to be protected, in combina-

tion with means for holding the cover in place.

2. A protecting cover for cornets and similar instruments having a piston box, comprising a body of flexible material having a contour which fits the piston box of the instrument to be protected, said body having a sleeve connected with the body, in combination with means for holding the cover in place.

3. A flexible hand grip and cover for cornets or similarly shaped wind instruments having a piston box, comprising a body portion which encircles the piston box, three sleeves connected to said body portion which sleeves encircle the two end tubes of the instrument and the part of the bell portion adjacent to the piston box, in combination with means for holding the body

and sleeves in operative relation, substantially as set forth.

4. A flexible hand grip for cornets and the like having a piston box, comprising a body portion which embraces the piston box, said body portion being cut out at both ends, said cut out portions surrounding the respective end tubes of the instrument, said body provided with a sleeve portion connected to the body at one end, adjacent to one cut out portion, said sleeve provided with fastening means at the sides of the sleeve; the sleeve being thereby provided with means to surround and be fastened to one set of end tubes, adjacent to the piston box.

In testimony whereof, I have signed my name to this specification.

HANS J. BACH.

20
25
30
35